

EXODUS LED

LED Emergency Bulkhead

FernHoward
Lighting



A weatherproof, stylish and robust LED emergency bulkhead, the Exodus can be used for 3 hour maintained or non-maintained applications

IP65

IK10

LED

3hr
EM

30,000
Hours
L70

EM Output
100 Lumens

Extended
3 YEAR
Warranty
Register with us
excl. batteries

FEATURES

- 3 hour maintained or non-maintained
- Energy efficient LED system with only 4W power consumption
- IP65 - formed-in-place foam gasket protects against dust and water
- Zero maintenance with LED lifespan of 30,000 hours (L70)
- Robust and vandal resistant polycarbonate body in white
- High-impact clear prismatic polycarbonate diffuser
- Retained diffuser screws
- Emergency exit legends are available separately
- Visible from 25m (when used with exit legend)

SIMPLE TO INSTALL AND USE



- Hinged LED geartray for quick installation
- Conduit entry points on both ends
- Can be wired for maintained or non-maintained use
- Wall or ceiling mountable

TYPICAL APPLICATIONS

Staircases, corridors and other escape routes that




EXODUS LED

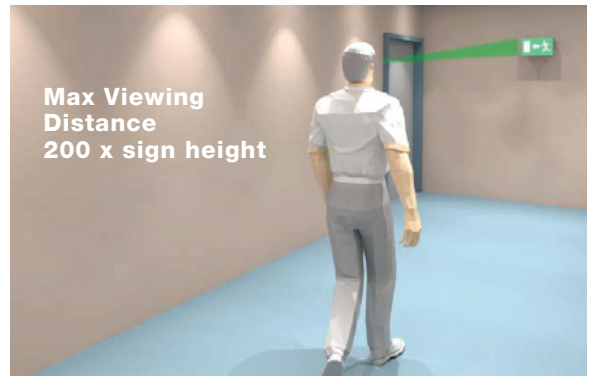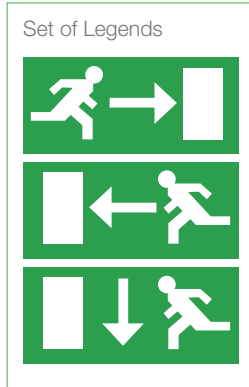

Maximum viewing distance for exit and safety signs based on viewing distances given in BS 5266 pt7/EN 1838 as 200 x Sign Height for internally illuminated signs.

25m Max Viewing Distance.

TECHNICAL INFORMATION

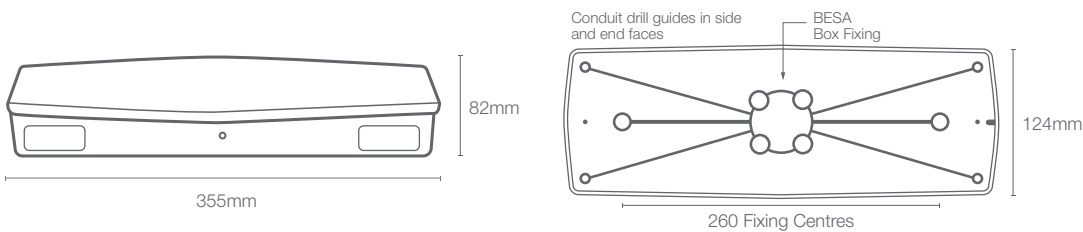

Dimensions:

355 x 82 x 124mm

Mounting type:



Base Colour Options:

○ White Body


Diffuser Options:

● Clear Prismatic

Weight:


1.1kg

LIGHT DISTRIBUTION



Photometric files at www.fernhoward.com

STANDARDS

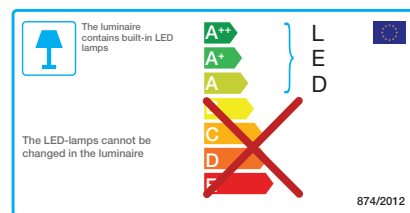

ORDERING GUIDE

Standard Product Code		Performance Data	
	Description	Lumen Output EM lm	Emergency Time
Exodus			
FHBL559-W-CL-EM	Exodus LED Emergency Bulkhead	100	3 hrs
FHS9009	Set of Emergency Exit Legends	-	-

Luminaires are manufactured and tested in accordance with BS EN60598. Incorporated control gear and components comply with BS/VDE standards. Luminaires are tested in accordance with IES LM-79-08.