
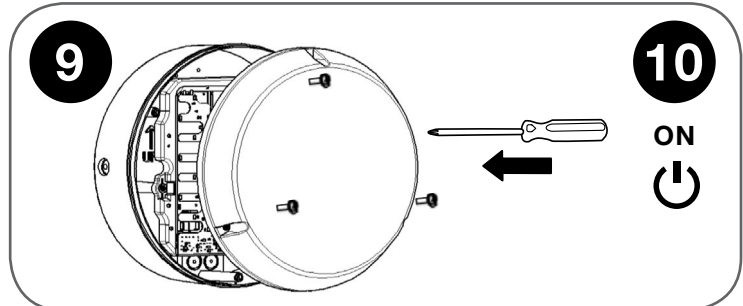
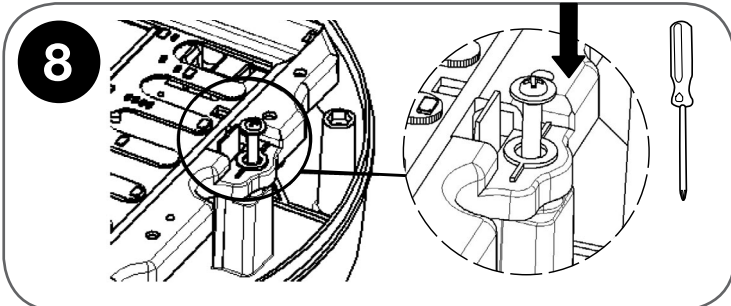
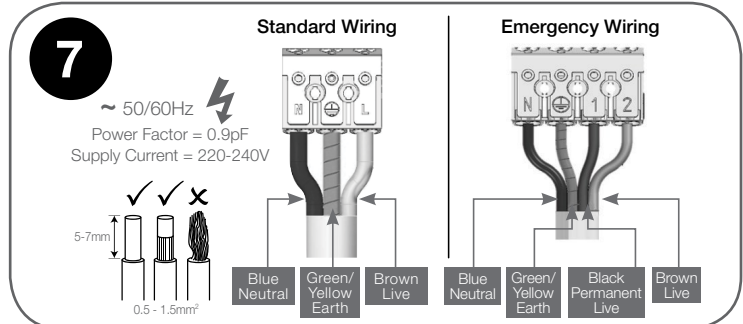
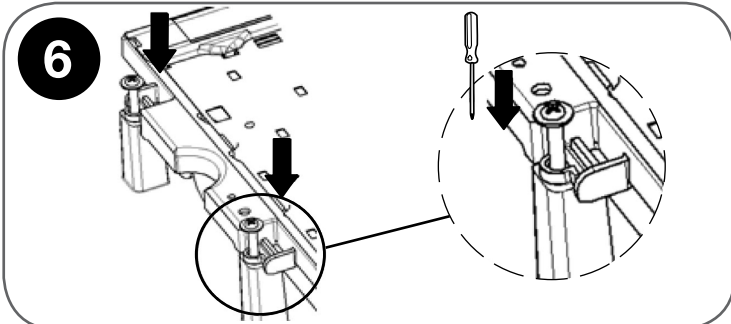
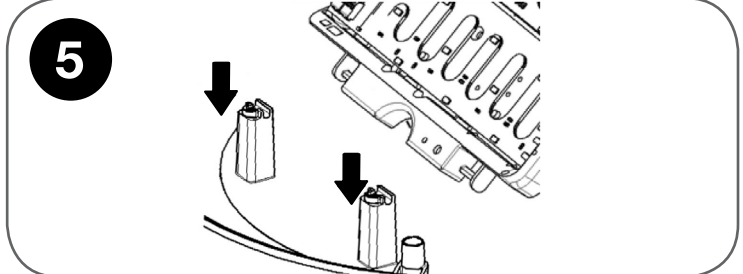
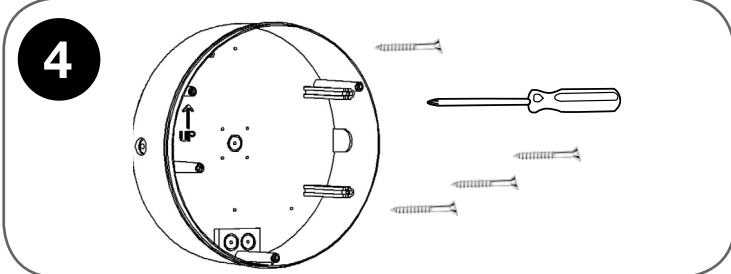
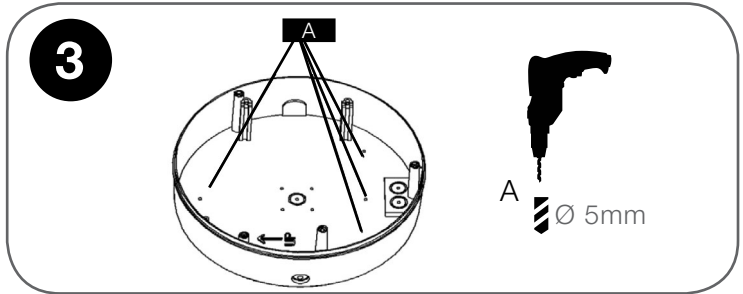
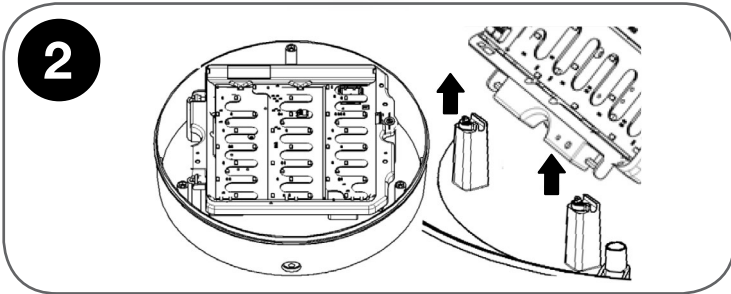


Installation Instructions - Alleycat Round Galaxy

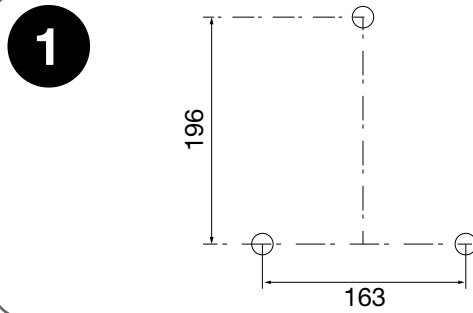

| Alleycat Round Galaxy | | | | | | |
|------------------------------------|----------------|--------------|--------------|------|-------|------|
| Product Code: | FHBL9965-090 | FHBL9965-160 | FHBL9965-210 | | | |
| Base Colour | White or Black | | | | | |
| Diffuser Option | Clear | Opal | Clear | Opal | Clear | Opal |
| Lumen Output (Lumens) | 950 | 520 | 1,525 | 830 | 1,800 | 990 |
| System Power Consumption (W) | 10 | 10 | 15 | 15 | 20 | 20 |
| Colour Temperature (K) | 4,000 | | | | | |
| CRI (Ra) | 84 | | | | | |
| Life (L85 Hours) | 30,000 (L70) | | | | | |
| Efficacy (Lumens Per Circuit Watt) | 95 | 52 | 102 | 55 | 90 | 50 |

| Circuit Breaker Type | No. of Products |
|----------------------|-----------------|
| C10 | 50 |
| C13 | 65 |
| C16 | 80 |
| C20 | 100 |
| B10 | 30 |
| B13 | 39 |
| B16 | 48 |
| B20 | 60 |

SUITABLE FOR LOOPING IN



For more Information call 01420 470 400 email lighting@fernhoward.com or visit www.fernhoward.com